


MODEL: Modular grating






Description: Modular grating for curves

Material: PP

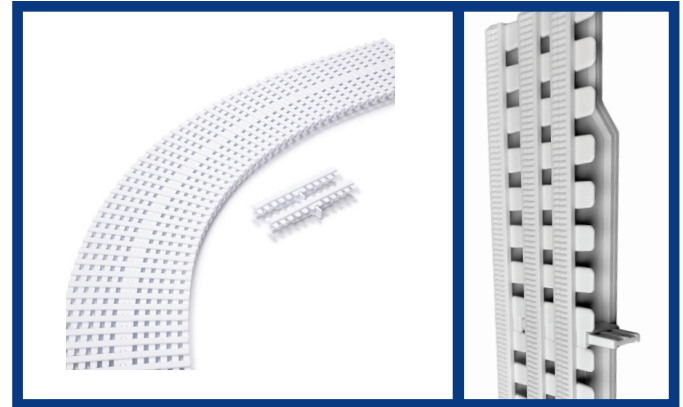Protection UV: YES

Reversibility: One side assembly






| Add to code | RAL | SAMPLE |
|-------------|------|---|
| -37258 | 7012 |  |
| CL90 | 1015 |  |
| CL109 | 8002 |  |
| CL60 | 5003 |  |
| CL108 | 5024 |  |

* More colors on request

DIMENSIONS

| CODE | L | L1 | h | R | r | Uts. / m. | Drain flow |
|-------|--------|--------|-------|--------|--------|-----------|--------------------------|
| 28656 | 200 mm | 195 mm | 22 mm | 535 mm | 340 mm | 43 | 52,02 m ³ /h |
| 28657 | 250 mm | 245 mm | 22 mm | 600 mm | 355 mm | 44 | 62,47 m ³ /h |
| 28658 | 300 mm | 295 mm | 22 mm | 870 mm | 575 mm | 44 | 72,86 m ³ /h |
| 28659 | 340 mm | 335 mm | 22 mm | 840 mm | 505 mm | 43 | 105,18 m ³ /h |

CHANNEL WIDTH AND HEIGHT

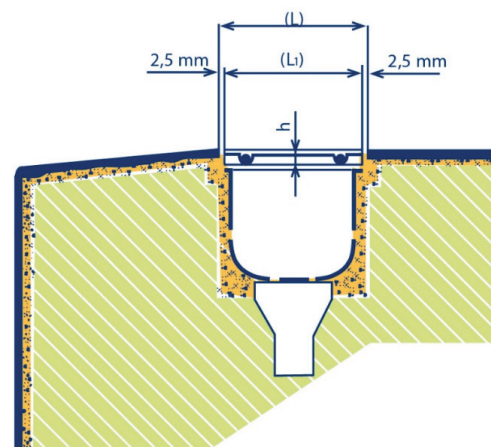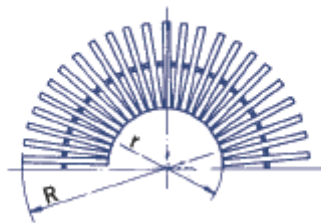

REGULATIONS

| REGULATION | DESCRIPTION |
|-------------------------|---|
| EN 13451-1 - Appendix E | Slipping resistance test - maximum tilt angle as European test with bare foot sliding |
| UNE-ENV 12633 | Class 3 required for pool according to the CTE for slipping test resistance |
| EN 13451-1: 2012 | Entrapment test - Only for codes 28656 and 28657 |